

## PRODUCT DATA SHEET

Standing: 2021-12-21

LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

### Features

- Bridge thermostatic circulator with latest microprocessor technology technology
- Easily readable green LED display for temperature
- User-friendly menu guidance with simplest 3-key operation
- EasyUse system for simple operation of the whole unit
- SelfCheck Assistant for system diagnosis
- Fully electronic continuous controller with PID action for internal & external control
- PowerAdapt system for the use of the maximum possible amount of heat permitted by the power supply system
- Low-level and adjustable over-temperature protection with acoustic alarm for use with flammable and non-flammable liquids
- LAUDA Varioflex pump (pressure) with 8 selectable levels
- Option for upgrading with up to 2 interfaces (RS 232/485, Profibus, analogue or contact modules, Ethernet-USB module)
- Pump connectors on the side and in the back, installed bypass
- Telescopic rods for bath widths up to 550 mm



Reserve technical changes



Working temperature min.  
30 °C



Working temperature max.  
300 °C

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser

## PRODUCT DATA SHEET

Standing: 2021-12-21

LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

### Technical Features (according to DIN 12876)

Working temperature range	30 ... 300 °C
Working temperature range with external cooling	20 ... 300 °C
Operating temperature range	-30 ... 300 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.01 ± K
Heater power max.	3.6 kW
Current max.	16 A
Power consumption max.	3.7 kW
Pump Pressure max.	1.1 bar
Pump flow rate pressure max.	32 L/min
Overall dimensions (WxDxH)	320 x 185 x 400 mm
Weight	8 kg
Power supply	230 V; 50/60 Hz
Power plug	Power cord with angled plug (CEE7/7)

Reserve technical changes

### Standard accessories

- 4 screw caps, 4 closing plugs
- 2 nipples 13 mm for pump connectors

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser


## PRODUCT DATA SHEET

Standing: 2021-12-21

LAUDA Proline PBD

Bridge thermostat 230 V; 50/60 Hz

Part Number: L001544

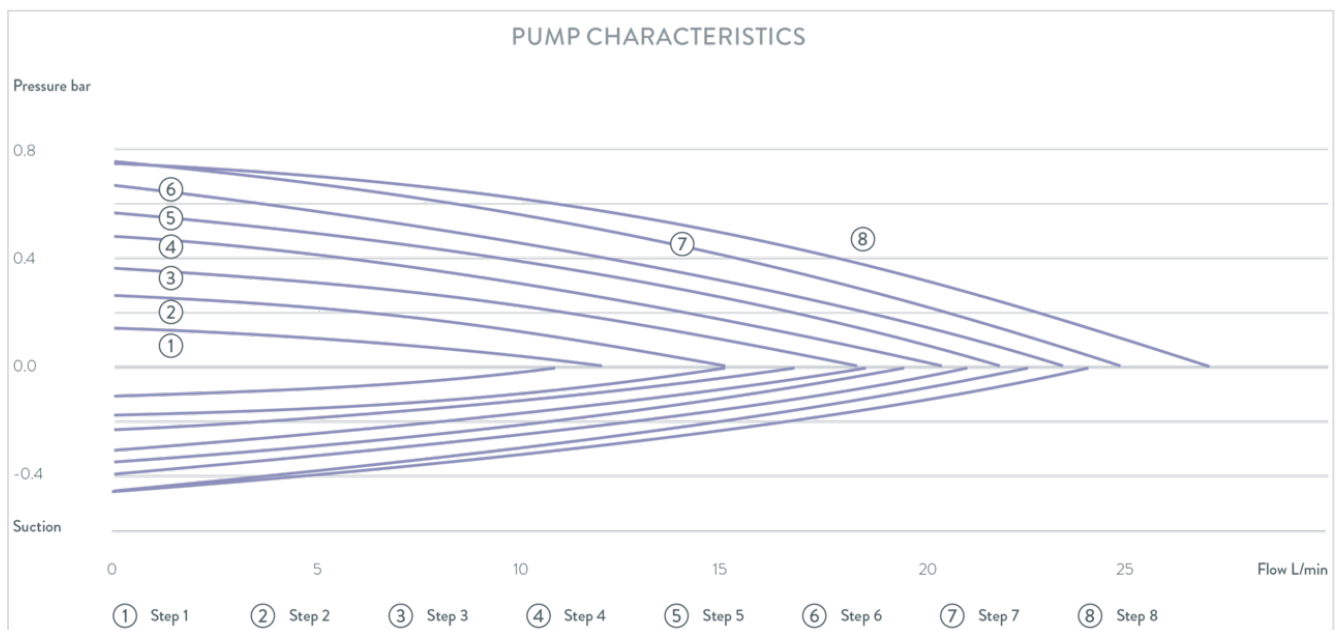

Reserve technical changes

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser