

## PRODUCT DATA SHEET

Standing: 2021-12-03

LAUDA Microcool MC 350

Circulation chiller 220 V; 60 Hz + 230 V; 50 Hz

Part Number: L001047

### Features

- Circulation chiller
- 1-line LED display for display of actual or set temperature
- User-friendly menu guidance with simplest 3-key operation
- Fully electronic continuous controller
- Temperature protection for the pump windings, lighted level indication and low level alarm
- Magnetically coupled block pump
- RS 232 interface
- Auto-Start-Timer and Auto-Shut-Down function
- Filler opening on top, outlet connection on the backside
- Cooling capacity adjustment by solenoid valve control including compressor on-off control
- Condenser cooling Air
- Operates with non flammable liquids (water, water/glycol)



Reserve technical changes



Working temperature min.  
-10 °C



Working temperature max.  
40 °C

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser

# PRODUCT DATA SHEET

Standing: 2021-12-03

## LAUDA Microcool MC 350

Circulation chiller 220 V; 60 Hz + 230 V; 50 Hz

Part Number: L001047

### Technical Features (according to DIN 12876)

Working temperature range	-10 ... 40 °C
Ambient temperature range	5 ... 40 °C
Temperature stability	0.5 ± K
Pump Pressure max.	0.4 bar
Pump flow rate pressure max.	16 L/min
Filling volume min.	4 L
Filling volume max.	7 L
Overall dimensions (WxDxH)	240 x 400 x 500 mm
Noise level	60 dB(A)
Net Weight	34 kg
Power consumption max.	0.5 kW
Current max.	3 A
Refrigerant stage 1	R-134a (GWP 1430); 0.095 kg; 0.1 t CO2-eq
Power supply	220 V; 60 Hz / 230 V; 50 Hz
Power plug	Power cord with angled plug (CEE7/7)

Reserve technical changes

Temperature	Heat transfer liquid	Cooling Capacity 50 Hz
20 °C	Ethanol	0.35 kW
10 °C	Ethanol	0.27 kW
0 °C	Ethanol	0.2 kW
-10 °C	Ethanol	0.12 kW

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser


## PRODUCT DATA SHEET

Standing: 2021-12-03

LAUDA Microcool MC 350

Circulation chiller 220 V; 60 Hz + 230 V; 50 Hz

Part Number: L001047

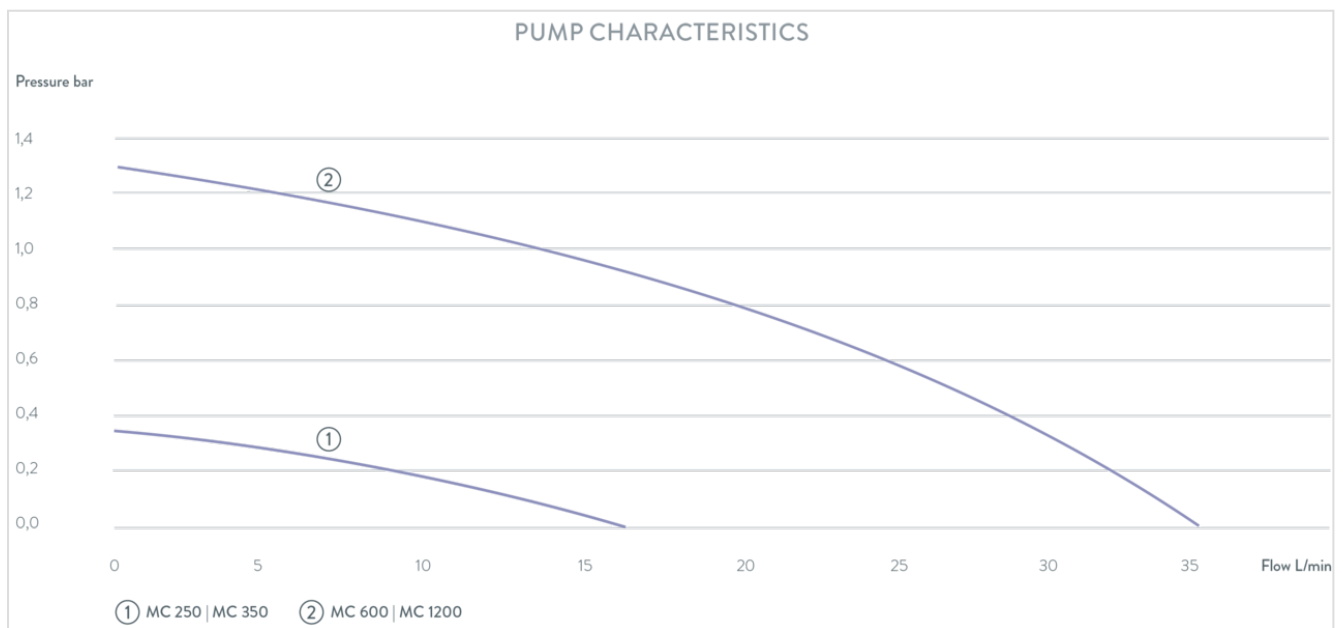

Reserve technical changes

LAUDA DR. R. WOBSEY GMBH & CO. KG  
Laudaplatz 1 • 97922 Lauda-Königshofen  
Postfach 1251 • 97912 Lauda-Königshofen • DE

T + 49 (0) 9343 503-0 • F + 49 (0) 9343 503-222  
info@lauda.de • www.lauda.de  
WEEE-Reg-Nr.: DE 66 42 40 57

Kommanditgesellschaft: Sitz Lauda-Königshofen  
Registergericht Mannheim • HRA 560069

Persönlich haftende Gesellschafterin:  
LAUDA DR. R. WOBSEY Verwaltungs-GmbH  
Sitz Lauda-Königshofen  
Registergericht Mannheim • HRB 560226

Geschäftsführer:  
Dr. Gunther Wobser (Vors.), Dr. Mario Englert,  
Dr. Marc Stricker  
Beirat: Dr. Gerhard Wobser